


BUILD-YOUR-OWN ISLAND CUTOUT DIMENSIONS

(MUST CONFORM TO LOCAL CODES. CONSULT YOUR BUILDER)

LEAVE A MINIMUM OF 8" BETWEEN CUTOUTS HERE TO ALLOW FOR TRIM

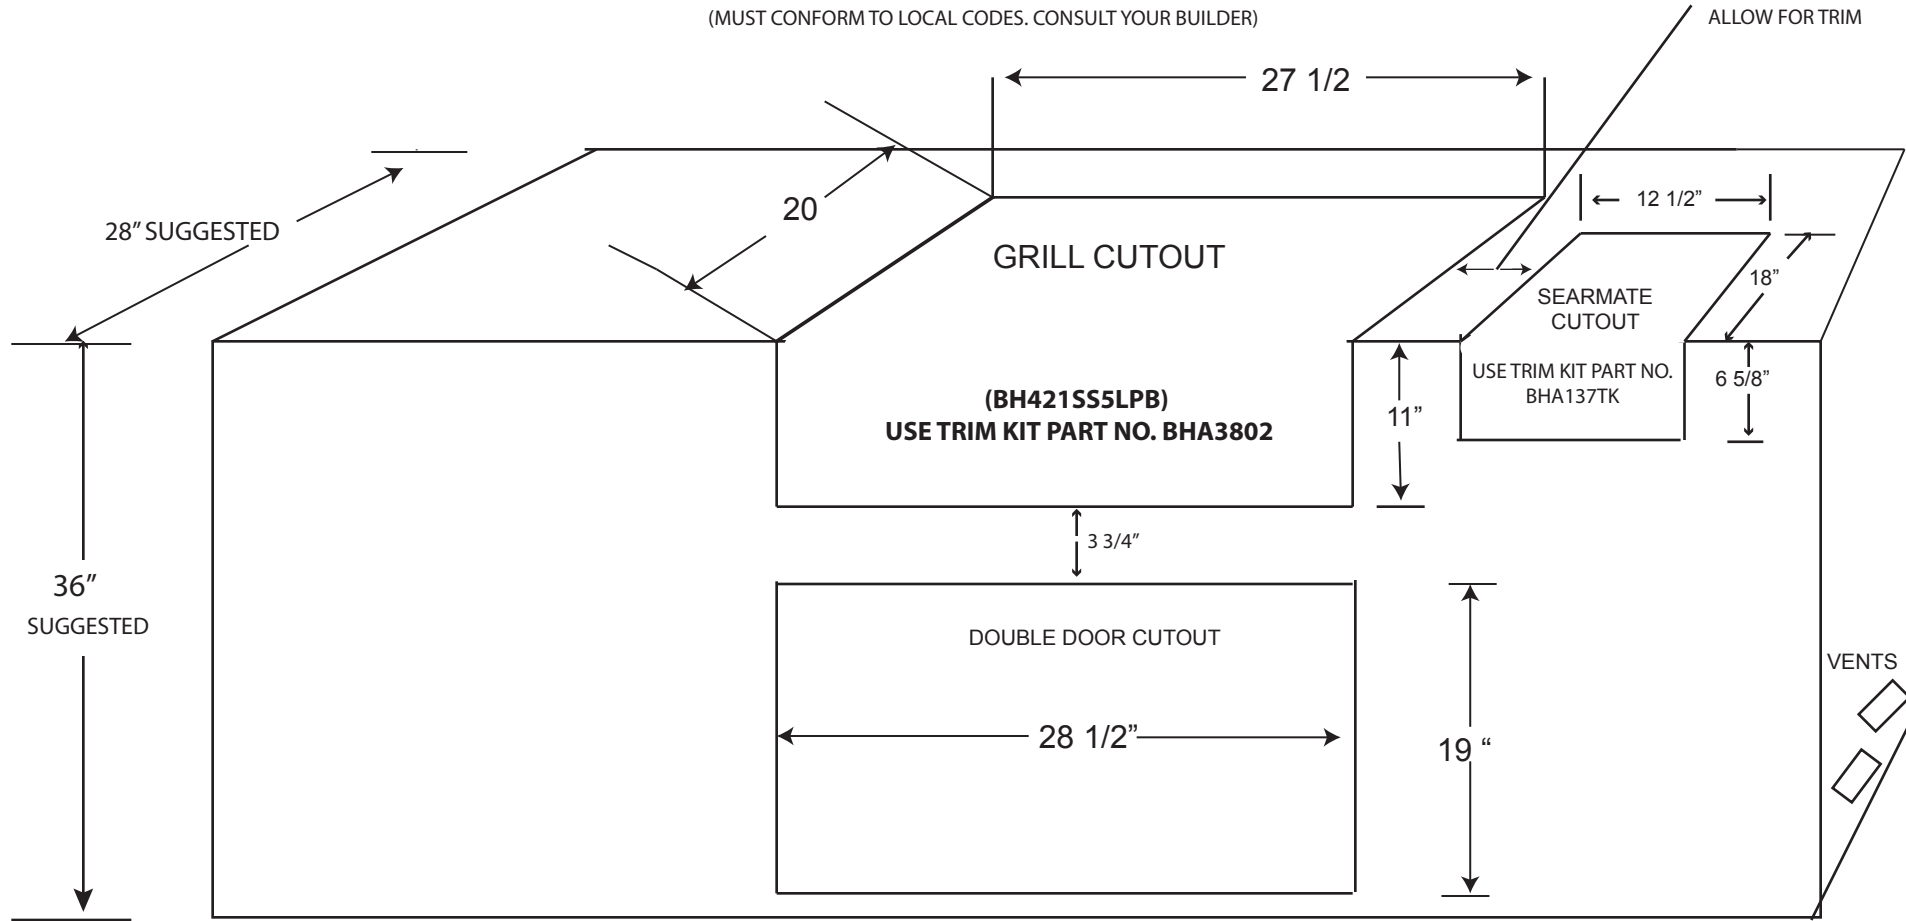

(NOT TO SCALE)

USE THESE DIMENSIONS WHEN USING **BHA3802** TRIM KIT WITH HOLLAND'S **BHIDD** DOUBLE DOORS ONLY

CABINET FRAME MUST BE CONSTRUCTED OF NON COMBUSTIBLE MATERIAL. CUT VENTS ON BOTTOM OF BOTH SIDES AND REAR.

MUST ALLOW SPACING FOR TRIM FLANGE (SEE OVERALL DIMENSIONS) AROUND DOORS, DRAWERS AND TRIM KITS. MAKE SURE TO ALLOW FOR TRIM BETWEEN GRILL, DOOR AND SEARMATE CUTOUTS.

NOTES: SEARMATE MUST BE INSTALLED ON RIGHT SIDE OF GRILL BODY
ALLOW SPACING BETWEEN GRILL HEAD AND SEARMATE TO ACCOMODATE TRIM
MAKE SURE THE SEARMATE GAS HOSE DOES NOT INTERFERE WITH DRIP TRAY OPERATION. TRAY MUST PULL OUT UNINHIBITED FROM THE FRONT.